

Schüco Porte ADS 75 HD.II

Schüco Door ADS 75 HD.II

Élégante avec ses rosettes affleurantes et ses paumelles invisibles, l'ADS 75 HD.II décline son design dans une nouvelle version jusqu'à 3 m.


With its elegant flush cover plates and invisible hinges, the ADS 75 HD.II is now available in a new version up to 3 m design.



Schüco ADS 75 HD.II
Schüco ADS 75 HD.II



Schüco Porte ADS 75 HD.II
Schüco Door ADS 75 HD.II

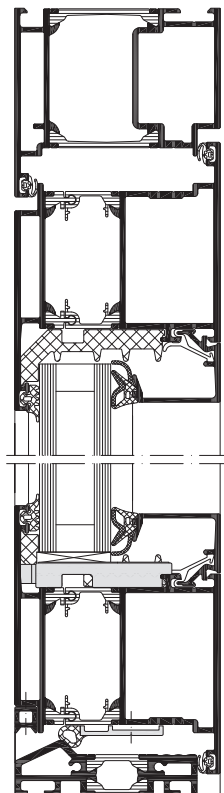

Schüco ADS 75 HD.II
Schüco ADS 75 HD.II

Sécurité de l'investissement	Investment security
<ul style="list-style-type: none"> Adaptée pour tous types de remplissage Nouvelle technologie de joints en mousse EPDM à cellules fermées Joints de vitrage simples ou à lèvres Seuil PMR¹ Serrures de sécurité multipoints et pions anti-dégondage (RC3) Ouvertures : int/ext, anti-pince-doigts Dimensions max. L x H : 1400 x 3000 mm (1 vantail) - 2800 x 3000 mm (2 vantaux) Option : assistance motorisée Push-and-Go Paumelles cylindriques, en applique ou encastrées (invisibles porte fermée) Gestion de l'effet bilame (Brevet Schüco) 	<ul style="list-style-type: none"> Suitable for all types of filler strip New two-component joint technology: EPDM closed-cell foam Simple glazing joints or raised glazing joints Threshold for people with reduced mobility Multi-point security locks and anti-crow bar bolts (RC3) Openings: in/outward, finger-pinch protection Max. dimensions L x H: 1400 x 3000 mm (1 leaf) - 2800 x 3000 mm (2 leaves) Option: Push-and-Go motorized assistance Cylindrical hinges, pin hinges or recessed hinges (invisible when the door is closed) Management of the bimetal effect (Schüco patent)
Bénéfices prescription	Planning benefits
<ul style="list-style-type: none"> Thermique : Ud = 1,5 W/m².K (Ug = 1,0 W/m².K) Prise de volume max. : 57 mm Poids max. : 200 kg 	<ul style="list-style-type: none"> Thermal: Ud = 1,5 W/m².K (Ug = 1,0 W/m².K) Max. glazing thickness: 57 mm Max. weight: 200 kg
Bénéfices fabrication	Fabrication benefits
<ul style="list-style-type: none"> Ouvrants tournants optimisant les chutes 	<ul style="list-style-type: none"> 4 side opening frames optimize losses

¹ Personnes à mobilité réduite / People with reduced mobility